


Sechskantstangen gezogen aus Wieland-Messing



Abmessung	Gewicht	Verpackung	Material-Nr.	Zustand	Toleranz	Länge	Enden- ausführung
Wieland Z33, CuZn39Pb3, EN 12164 W5006							
4,0	0,118	●	451104000	R500	+0/-0,08	3.000 ± 30	angefast/angespitzt
4,5	0,149	●	451104500				
5,0	0,184	●	451105000				
5,5	0,223	●	451105500				
6,0	0,265	●	451106000				
7,0	0,361	●	451107000				
8,0	0,471	●	451108000				
9,0	0,596	●	451109000				
10,0	0,736	●	451110000				
11,0	0,892	○	451111000				
12,0	1,060	○	451112000	R430	+0/-0,11	3.000 ± 30	angefast/angespitzt
13,0	1,244	○	451113000				
14,0	1,444	○	451114000				
15,0	1,656	○	451115000				
16,0	1,884	○	451116000				
17,0	2,128	○	451417000				
18,0	2,384	○	451418000				
19,0	2,656	○	451419000				
20,0	2,944	○	451420000				
21,0	3,256	○	451421000				
22,0	3,563	○	451422000	M	+0/-0,13	3.000 ± 100	angefast/gesägt
23,0	3,894	○	451423000				
24,0	4,240	○	451424000				
25,0	4,600	○	451425000				
27,0	5,370	○	451427000				
30,0	6,624	○	451430000				
32,0	7,540	○	451432000				
36,0	9,540	○	451236000				
38,0	10,630	○	451238000				
41,0	12,370	○	451241000				
46,0	15,580	○	451246000	M	+0/-0,16	3.000 ± 100	beidseitig gesägt
50,0	18,400	○	451250000				
55,0	22,270	○	451255000				
60,0	26,500	○	451260000				
					+0/-0,19		

Abmessung	Gewicht	Verpackung	Material-Nr.	Zustand	Toleranz	Länge	Enden- ausführung
Wieland Z21, CuZn38Pb2, EN 12164							
6,0	0,262	●	451506000	R410	+0/-0,08	3.000 ± 30	angefast/angespitzt
8,0	0,466	●	451508000				
10,0	0,727	●	451510000				
14,0	1,426	○	451514000				
17,0	2,102	○	451517000				

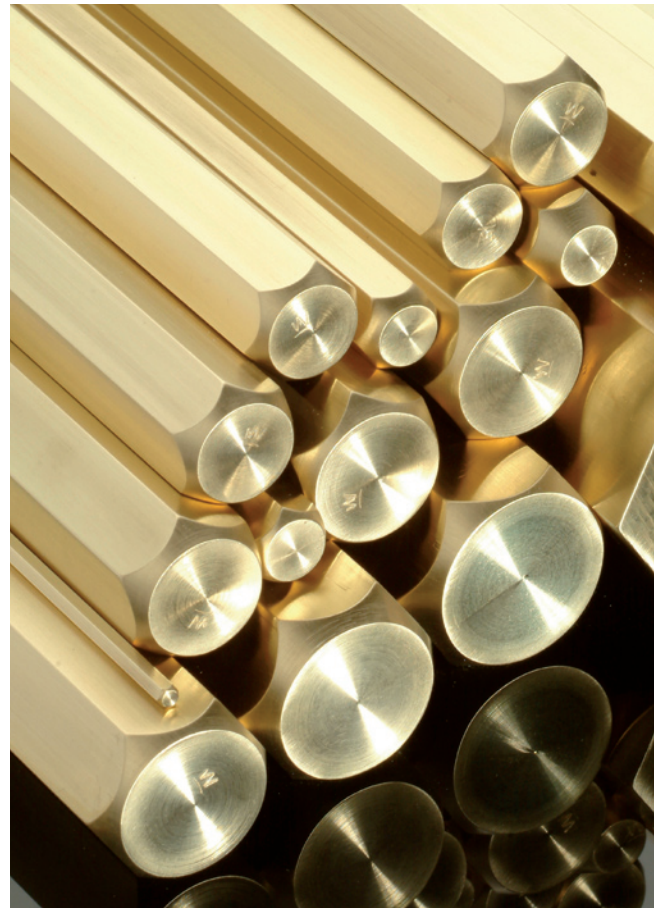

Standardverpackung: ● = in Holzkisten von ca. 500 kg
 ○ = in Bunden von ca. 500 kg,
 alternativ in Bunden ca. 1.000 kg möglich